


ACCESSORIES

MAGNETIC CHUCKS

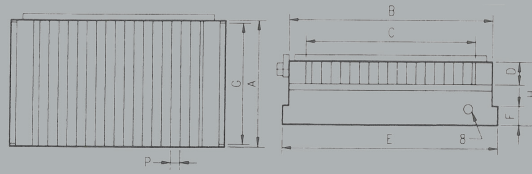


FEATURES

- Magnetic Force 18KGF
- High Precision Working Surface
- Easy Switching

Model	Size	Chucking Size				Pole Gap	Chuck Mounting Face	E	F	Switch Type	Height	Weight
		A	B	C	D							
VG-510	125x250mm	125mm	250mm	206mm	20mm	8(2+6)mm	125mm	262mm	15mm	Hex Socket	50mm	12kg
VG-612	150x300mm	150mm	300mm	256mm	20mm	8(2+6)mm	150mm	318mm	15mm	Hex Socket	50mm	18kg
VG-618	150x450mm	150mm	450mm	406mm	20mm	8(2+6)mm	150mm	468mm	15mm	Hex Socket	50mm	27kg
VG-816	200x400mm	200mm	400mm	356mm	20mm	8(2+6)mm	200mm	418mm	15mm	Hex Socket	50mm	31kg
VG-1020	250x500mm	250mm	500mm	500mm	20mm	8(2+6)mm	250mm	518mm	15mm	Hex Socket	50mm	48kg

RADIUS ANGLE DRESSER





Max Wheel Diameter	11"
Concave Radius with Standard Diamonds	0-21/4"
Concave Radius with RTA-Tail Diamonds	0-21/4"
Concave Radius	0-4"
Tangent Travel in either Direction	1.950"
Centre Line	3.4"

FEATURES



- .6 minute reading
- 5 1/2" long x 6 1/2" high
- Dual purpose dial for drum & angle movement
- Stop for Convex and Concave Radius
- Comes with Setting Gauge for Diamond Tool

SINE VICE

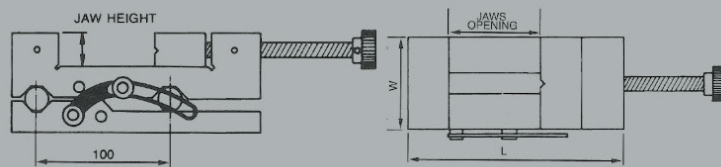

Stock Code	Material	Length	Width	Jaw Opening	Jaw Height	Angle	Harden	Net Weight
VER-SVD-200	SK2	155mm	48mm	60mm	25mm	0-46o	HRC56o-58o	5kg
VER-SVD-250	SK2	176mm	63mm	70mm	30mm	0-46o	HRC56o-58o	8kg
VER-SVD-300	SK2	180mm	75mm	85mm	30mm	0-46o	HRC56o-58o	12kg

TOOLMAKERS VICE



Stock Code	A	B	C	D	E	F	G	H	I	J	Net Weight
VER-VC-20	135mm	48mm	42mm	20mm	22mm	23mm	62mm	40mm	M6	5x7mm	2kg
VER-VC-25	160mm	70mm	62mm	30mm	32mm	33mm	80mm	45mm	M6	8x7mm	3kg
VER-VC-30	175mm	73mm	65mm	32mm	33mm	35mm	95mm	45mm	M6	8x7mm	4kg